



Suspended version



LED LUMINAIRES
SUITABLE FOR WET LOCATIONS
LEDS ARE NOT REPLACEABLE



WARNING

ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT PRIOR AUTHORIZATION


- Risk of fire/electric shock: turn off power before installation or maintenance.
- Risk of fire/electric shock: fixtures should always be installed, inspected and maintained in accordance with local and national electric codes by qualified electricians only.
- Risk of burning: make sure fixture is cool when performing maintenance.
- Risk of burning: keep fixtures away from materials that may burn.
- Perform electrical and mechanical maintenance on a regular basis at least once per year. Harsh environments might require more frequent controls.
- Do not operate the fixtures with a missing or damaged shield.
- Do not place the fixture in contact with corrosive substances such as fertilizers, weed killers or detergents.
- Fixture screens should be cleaned on regular basis to ensure lighting performance are maintained.
- All gaskets, O-rings and sealing surfaces must be kept clean during installation and service; failure to do this may cause an unsafe condition.
- Read carefully these instruction before installing the fixture and retain for future reference.

SAVE THESE INSTRUCTIONS

Note: specifications and dimensions subject to change without notice.

This data sheet and other technical documents continually updated can be accessed at www.arcluce-us.com

SPECIFICATIONS

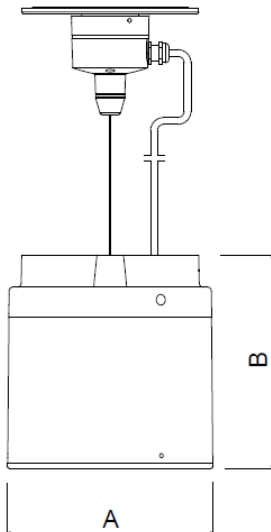

MECHANICAL

Dimensions: A: \varnothing 8" 5/16
B: 8" 11/16

Weight: 9.26 lb

Suspension wire length: 5'

Rated Ta : $-20^{\circ}\text{C} \div +25^{\circ}\text{C}$

ELECTRICAL

Wiring: S

Input: 120-277V 50/60Hz

Dimming: 0-10V

Typical power consumption: 41 W

INSTALLATION

1. Adjust height of suspension wire and cut it accordingly.
2. Wire the fixture using a waterproof outdoor-rated junction box (by others) according to diagram.
3. Fix the universal plate (supplied with fixture) to the j-box and position the gasket
4. Slide cover in position and secure with screws (supplied with fixture)
5. Attach cable-cup and secure with grub screws (supplied with fixture)

