



**LED LUMINAIRES  
SUITABLE FOR WET LOCATIONS  
LEDS ARE NOT REPLACEABLE**

 **WARNING:**

**ENG**

**ANY MODIFICATION TO THIS FITTING IS FORBIDDEN WITHOUT OUR AUTHORIZATION**





- Risk of fire/electric shock: turn off power before installation or maintenance.
- Risk of fire/electric shock: fixtures should always be installed, inspected and maintained in accordance with local and national electric codes by qualified electricians only.
- Risk of burning: make sure fixture is cool when performing maintenance.
- Risk of burning: keep fixtures away from materials that may burn.
- Perform electrical and mechanical maintenance on a regular basis at least once per year. Harsh environments might require more frequent controls.
- Do not operate the fixtures with a missing or damaged shield.
- Do not place the fixture in contact with corrosive substances such as fertilizers, weed killers or detergents.
- Fixture screens should be cleaned on regular basis to ensure lighting performance are maintained.
- All gaskets, O-rings and sealing surfaces must be kept clean during installation and service; failure to do this may cause an unsafe condition.
- Read carefully these instruction before installing the fixture and retain for future reference.

Note: specifications and dimensions subject to change without notice.  
This data sheet and other technical documents continually updated can be accessed at [www.arcluce-us.com](http://www.arcluce-us.com)

 **TOOLS**

- Allen wrench
- Small slotted screwdriver

**SPECIFICATION**

  	<p><b>WEIGHT</b>  <b>9.92 lb</b></p> <hr/> <p><b>RATED T<sub>A</sub></b> <b>25°C</b></p>	<table border="1"> <thead> <tr> <th><b>WIRING</b></th> <th><b>S</b></th> <th><b>R</b></th> </tr> </thead> <tbody> <tr> <td>Mains Voltage</td> <td colspan="2">120 - 277V</td> </tr> <tr> <td><b>Typical power consumption</b></td> <td colspan="2"><b>38W</b></td> </tr> <tr> <td>Dimming</td> <td>0-10V</td> <td>DALI</td> </tr> </tbody> </table>	<b>WIRING</b>	<b>S</b>	<b>R</b>	Mains Voltage	120 - 277V		<b>Typical power consumption</b>	<b>38W</b>		Dimming	0-10V	DALI
	<b>WIRING</b>	<b>S</b>	<b>R</b>											
Mains Voltage	120 - 277V													
<b>Typical power consumption</b>	<b>38W</b>													
Dimming	0-10V	DALI												

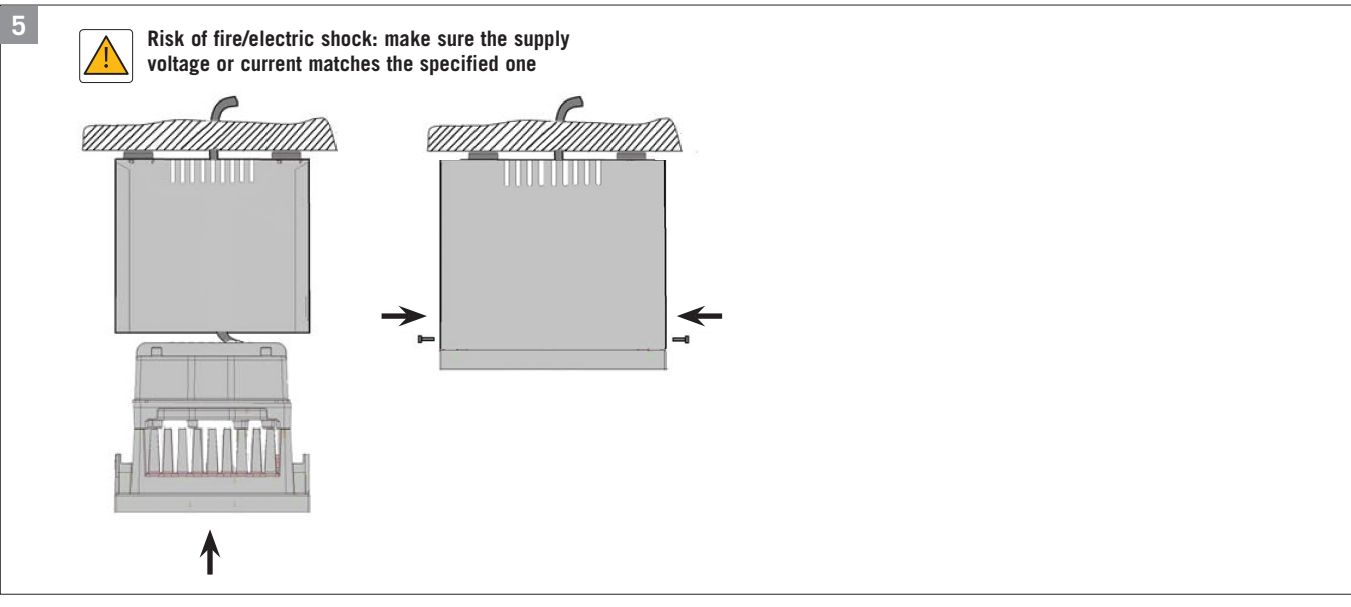
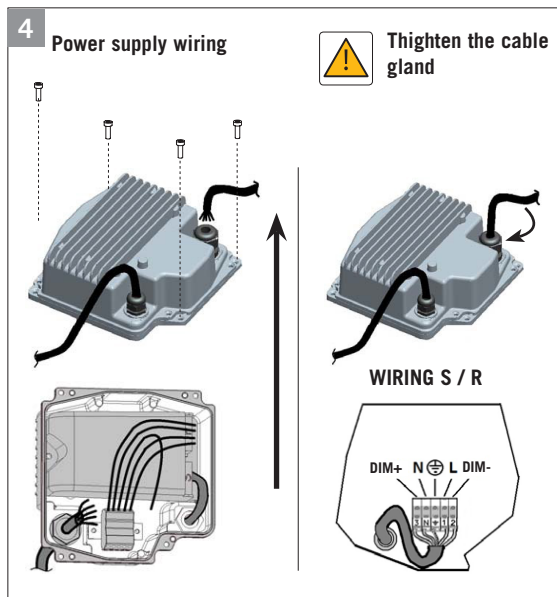
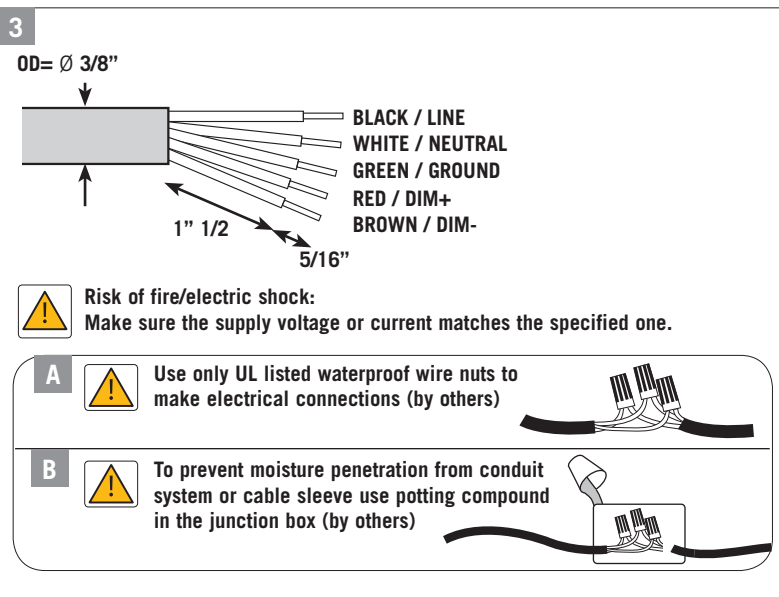
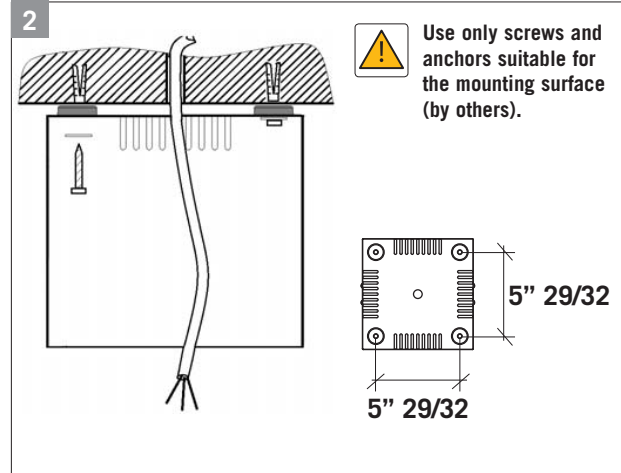
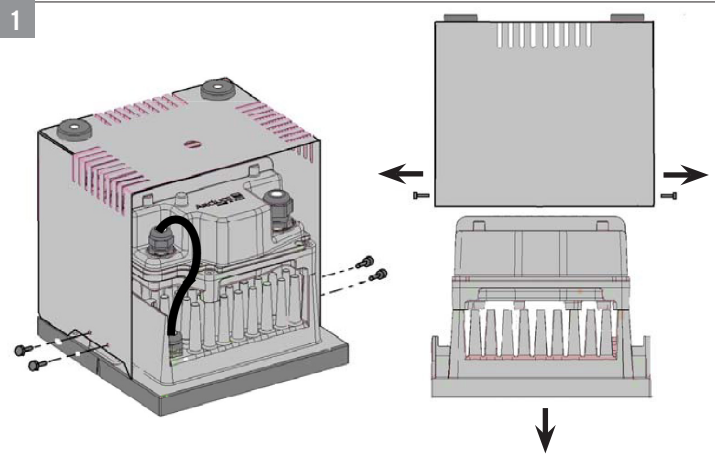
Data emissione: 2017.05.25

Stato di modifica: MO

Codice: 6555325.11

**INSTALLATION**

- 1 Fixture is supplied with 2' supply cord. Remove the four side screws and separate body from housing, see figure 1.
- 2 Using housing as a template, mark and drill desired location on mounting surface. Secure floodlight to surface using bolts and anchors or lag screws suitable for the specific mounting surface (by others), see figure 2.
- 3 Wire the fixture according to diagram, see figure 3.
- 4 Alternatively, it is possible to wire directly in the gearbox, see figure 4.
- 5 Reassemble body and housing with the four side screws, see figure 5.



Data emissione: 2017.05.25

Stato di modifica: MO

Codice: 6555325.11