

# FORMAT1 (Model)



## TECHNICAL INFORMATION

[IES Files](#)

<b>Watt</b>	14W – 47W
<b>Luminaire</b>	Up to 6200lm
<b>CCT</b>	3000K – 4000K
<b>CRI</b>	>80
<b>Wiring</b>	120-277V 60Hz / 0-10V
<b>LED life time</b>	> 60000h - L80 - B20 (Ta 25°C)
<b>Color</b>	Aluminium - 21 / Grey - 16

## DESCRIPTION

### Construction

- Die-cast aluminium body (EN 47100).
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- Silicone rubber gaskets.
- AISI 316 stainless steel external screws.

### Electrical & Optics

- Universal input voltage: 120-277V 50/60Hz.
- 0-10V dimming available.
- Driver protected against voltage surges up to 6kV.
- Wiring on removable galvanized steel tray.
- High-efficacy LEDs with standard 3000K, 4000K (2700K or other CCTs available on request).
- PMMA lenses for LEDs.
- Screen made of 3/16" thermal-shock resistant tempered glass.

### Listings

- UL certified to U.S. and Canadian standards, suitable for wet locations (cULus mark).
- Rated IP66 per EN60598.
- Luminaire rated for -40°C minimum ambient temperature.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.

### Installation

- Post-top installation (Ø 2" 3/8 tenon).

IP66



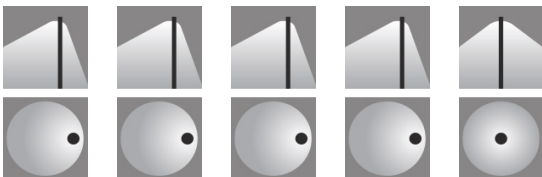
## VERSIONS *(Click on below link to configure your product)*



[format1](#)

- Size:
- 9" 27/32
  - 3" 3/4
  - 20" 15/32

## OPTICS




See accessories in the next page

## PAINTED DIE-CAST ALUMINIUM SINGLE POLE ATTACHMENT.

Arcluce Code **1099090X-21**

Code Ref.



## TECHNICAL INFORMATION


<b>Color</b>	Aluminium - 21
--------------	----------------

<b>Weight</b>	3.53 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM DOUBLE POLE ATTACHMENT (SUITABLE FOR PRODUCTS WITH A 60MM DIAMETER CONNECTION).

Arcluce Code **1099089X-21**

Code Ref.



## TECHNICAL INFORMATION


<b>Color</b>	Aluminium - 21
--------------	----------------

<b>Weight</b>	4.63 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM SINGLE POLE ATTACHMENT (Ø 102 MM).

Arcluce Code **1099088X-21**

Code Ref.



## TECHNICAL INFORMATION


<b>Color</b>	Aluminium - 21
--------------	----------------

<b>Weight</b>	4.85 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM DOUBLE POLE ATTACHMENT (Ø 102 MM).

Arcluce Code **1099087X-21**

Code Ref.



## TECHNICAL INFORMATION


<b>Color</b>	Aluminium - 21
--------------	----------------

<b>Weight</b>	7.72 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM WALL BRACKET.

Arcluce Code **1099069X-21**

Code Ref.

**TECHNICAL INFORMATION**


<b>Color</b>	Aluminium - 21
--------------	----------------

<b>Weight</b>	2.65 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM SINGLE POLE ATTACHMENT.

Arcluce Code **1099090X-16**

Code Ref.

**TECHNICAL INFORMATION**


<b>Color</b>	Grey - 16
--------------	-----------

<b>Weight</b>	3.53 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM DOUBLE POLE ATTACHMENT (SUITABLE FOR PRODUCTS WITH A 60MM DIAMETER CONNECTION).

Arcluce Code **1099089X-16**

Code Ref.

**TECHNICAL INFORMATION**


<b>Color</b>	Grey - 16
--------------	-----------

<b>Weight</b>	4.63 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM SINGLE POLE ATTACHMENT (Ø 102 MM).

Arcluce Code **1099088X-16**

Code Ref.

**TECHNICAL INFORMATION**


<b>Color</b>	Grey - 16
--------------	-----------

<b>Weight</b>	4.85 lb
---------------	---------

## PAINTED DIE-CAST ALUMINIUM DOUBLE POLE ATTACHMENT (Ø 102 MM).

Arcluce Code **1099087X-16**


Code Ref.

**TECHNICAL INFORMATION****Color** Grey - 16**Weight** 7.72 lb

## PAINTED DIE-CAST ALUMINIUM WALL BRACKET.

Arcluce Code **1099069X-16**

Code Ref.

**TECHNICAL INFORMATION****Color** Grey - 16**Weight** 2.65 lb