


STONE180 short (Model)

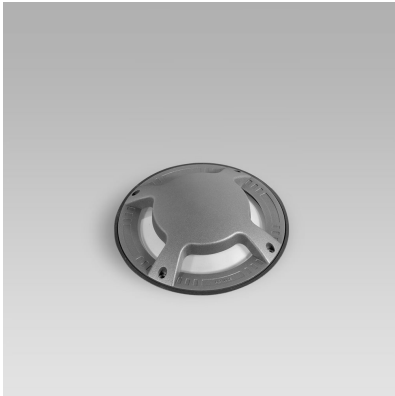

TECHNICAL INFORMATION


[IES Files](#) ↓

Watt	10W
Luminaire	Up to 190lm
CCT	3000K – 4000K
CRI	>80
Wiring	
LED life time	> 60000h - L80 - B20 (Ta 25°C)
Color	Grey - 16 / Aluminium - 21

DESCRIPTION



VERSIONS *(Click on below link to configure your product)*



[oneway](#)

[two-way](#)

[wide light - radial](#)

[oneway grazing illumination](#)

[two-way grazing illumination](#)


Size:
Ø 7" 3/32
4" 13/16
5" 5/16

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

Size:
Ø 7" 3/32
4" 13/16
5" 5/16



[radial grazing illumination](#)

Size:
Ø 7" 3/32
4" 13/16
5" 5/16

OPTICS




See accessories in the next page

THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099208X**Code Ref. **O7795****TECHNICAL INFORMATION****Weight** 0.44 lb

JUNCTION BOX IP68 - 4 WAYS - 2/3 POLES.

Arcluce Code **1099259X**Code Ref. **O7932****TECHNICAL INFORMATION****Weight** 0.11 lb

IP68 LINEAR JOINT - 2 WAYS - 3 POLES.

Arcluce Code **1099409X**

Code Ref.

**TECHNICAL INFORMATION****Weight** 0.07 lb
