


# STONE55 (Model)

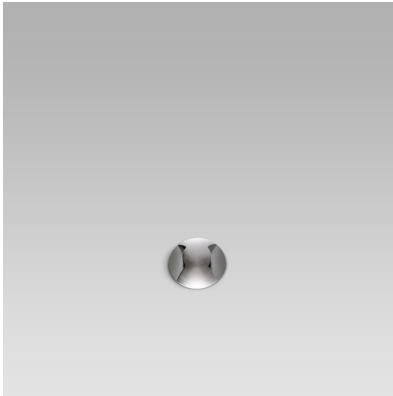

## TECHNICAL INFORMATION

[IES Files](#) ↓

<b>Watt</b>	2W
<b>Luminaire</b>	Up to 100lm
<b>CCT</b>	3000K – 4000K
<b>CRI</b>	>80
<b>Wiring</b>	700mA
<b>LED life time</b>	> 60000h - L80 - B20 (Ta 25°C)
<b>Color</b>	Stainless Steel - 30

## DESCRIPTION

### Construction

- construction die-cast aluminium body and trim (en 47100).
- construction polyester powder paint resistant to uv rays.

### Electrical & Optics

- electrical & optics recessed installation in a special outer casing (included in the package) in glass-fibre reinforced plastic material or in aisi 316l stainless steel. it is possible to pre-order the outer boxes to prepare the system.
- electrical & optics double cable gland pg16 for through wiring.
- electrical & optics supplied with power cable (0.7m).

### Listings

- listings this is a listing in english
- listings this is another listing in english


### Installation

- installation this is an installation in english
- installation this is another installation in english


IP68  
40"




## VERSIONS *(Click on below link to configure your product)*



[grazing - oneway](#)



[grazing - twoway](#)



[grazing - radial](#)

Size:  
Ø 2" 17/32  
3" 3/4  
4" 11/32

Size:  
Ø 2" 17/32  
3" 3/4  
4" 11/32

Size:  
Ø 2" 17/32  
3" 3/4  
4" 11/32

## OPTICS




See accessories in the next page

## THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099227X**

Code Ref.


**TECHNICAL INFORMATION****Weight** 0.18 lb

---

## STAINLESS STEEL AISI 316L INSTALLATION BOX.

Arcluce Code **1099225X**

Code Ref.


**TECHNICAL INFORMATION****Weight** 1.32 lb

---

## THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099226X**

Code Ref.

**TECHNICAL INFORMATION****Weight** 0.13 lb

---