


THUNDER25 (Model)

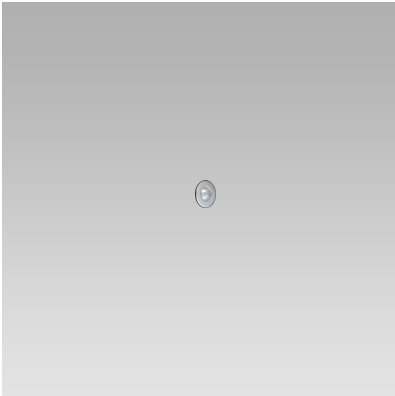

TECHNICAL INFORMATION


[IES Files](#) 

Watt	1W – 2W
Luminaire	Up to 125lm
CCT	3000K – 4000K
CRI	>80
Wiring	
LED life time	> 60000h - L80 - B20 (Ta 25°C)
Color	Stainless Steel - 30

DESCRIPTION



VERSIONS *(Click on below link to configure your product)*




[oneway](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32




[twoway](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32




[radial](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32



[flush trim](#)

Size:
Ø 1" 5/16
3" 5/32



[relief trim](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32




OPTICS



See accessories in the next page

THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099223X**
Code Ref.




TECHNICAL INFORMATION

Weight 0.13 lb

STAINLESS STEEL AISI 316L INSTALLATION BOX.

Arcluce Code **1099221X**
Code Ref.




TECHNICAL INFORMATION

Weight 0.46 lb

THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099222X**
Code Ref.




TECHNICAL INFORMATION

Weight 0.04 lb

JUNCTION BOX IP68 - 4 WAYS - 2/3 POLES.

Arcluce Code **1099259X**
Code Ref.



TECHNICAL INFORMATION

Weight 0.11 lb

IP68 LINEAR JOINT - 2 WAYS - 2 POLES.

Arcluce Code **1099408X**
Code Ref.



TECHNICAL INFORMATION

Weight	0.07 lb
---------------	---------