


THUNDER25 (Model)

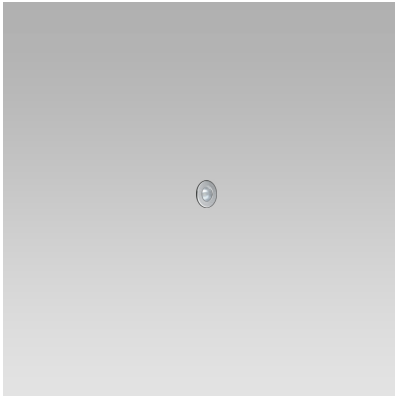

TECHNICAL INFORMATION

[IES Files](#)

| | |
|----------------------|--------------------------------|
| Watt | 2W |
| Luminaire | Up to 225lm |
| CCT | 3000K – 4000K |
| CRI | >80 |
| Wiring | ICC 350mA, ICC 700mA |
| LED life time | > 60000h - L80 - B20 (Ta 25°C) |
| Color | Stainless Steel - 30 |

DESCRIPTION

Construction

- AISI 316L stainless steel body and trim.
- Silicone rubber gaskets.

Electrical & Optics

- High-efficacy LEDs with standard 3000K, 4000K (2700K or other CCTs available on request).
- PMMA lenses for LEDs.
- Clear PMMA screen.
- To be operated only with constant voltage 24Vdc Class 2 remote drivers (order separately).

Listings

- UL certified to U.S. and Canadian standards, suitable for wet locations (cULus mark).
- Rated IP68 per EN60598.
- Luminaire rated for -40°C minimum ambient temperature.
- High quality LED sources characterized according to IES TM-30, with high color consistency <3SDCM and long useful life >60000 hours at L80.


Installation

- Recessed installation.
- Supplied with recessed installation box made of engineering plastic.
- Other recessed installation boxes made of engineering plastic or of AISI 316L stainless steel available.
- Supplied with power cord. 22AWG conductors.

IP68
40"




VERSIONS *(Click on below link to configure your product)*




[oneway](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32




[twoway](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32




[radial](#)

Size:
Ø 1" 11/32
3" 3/4
4" 11/32



[flush trim](#)

Size:
Ø 1" 5/16
3" 5/32



[relief trim](#)


Size:
Ø 1" 11/32
3" 3/4
4" 11/32

OPTICS



See accessories in the next page


THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099223X**Code Ref. **O7290**

TECHNICAL INFORMATION

Weight 0.13 lb


STAINLESS STEEL AISI 316L INSTALLATION BOX.

Arcluce Code **1099221X**Code Ref. **O7292**

TECHNICAL INFORMATION

Weight 0.46 lb

THERMOPLASTIC MATERIAL RECESSED INSTALLATION BOX.

Arcluce Code **1099222X**Code Ref. **O7298**

TECHNICAL INFORMATION

Weight 0.04 lb
